

FIG. 1

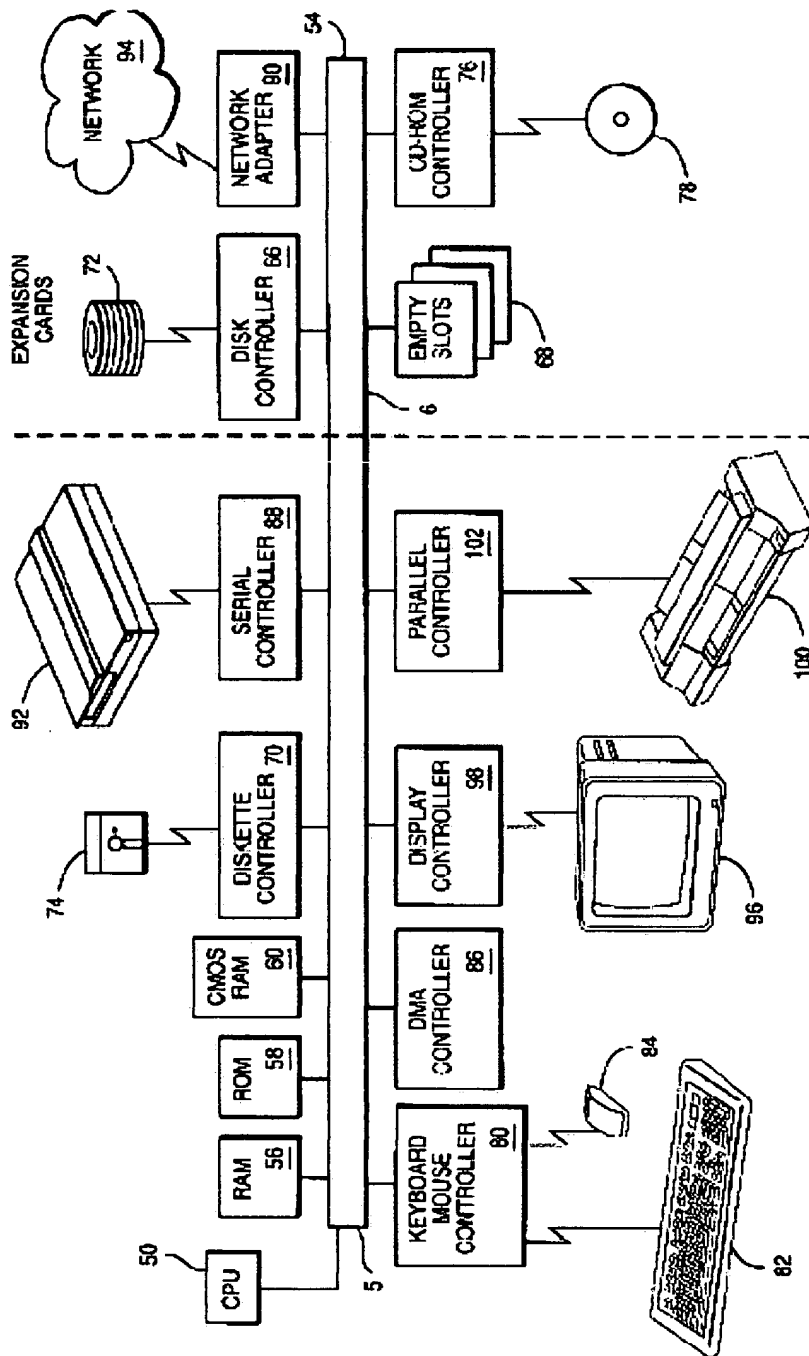


FIG. 2

2/10 IBM
Docket No.
AUS9-2000-
0697-US1

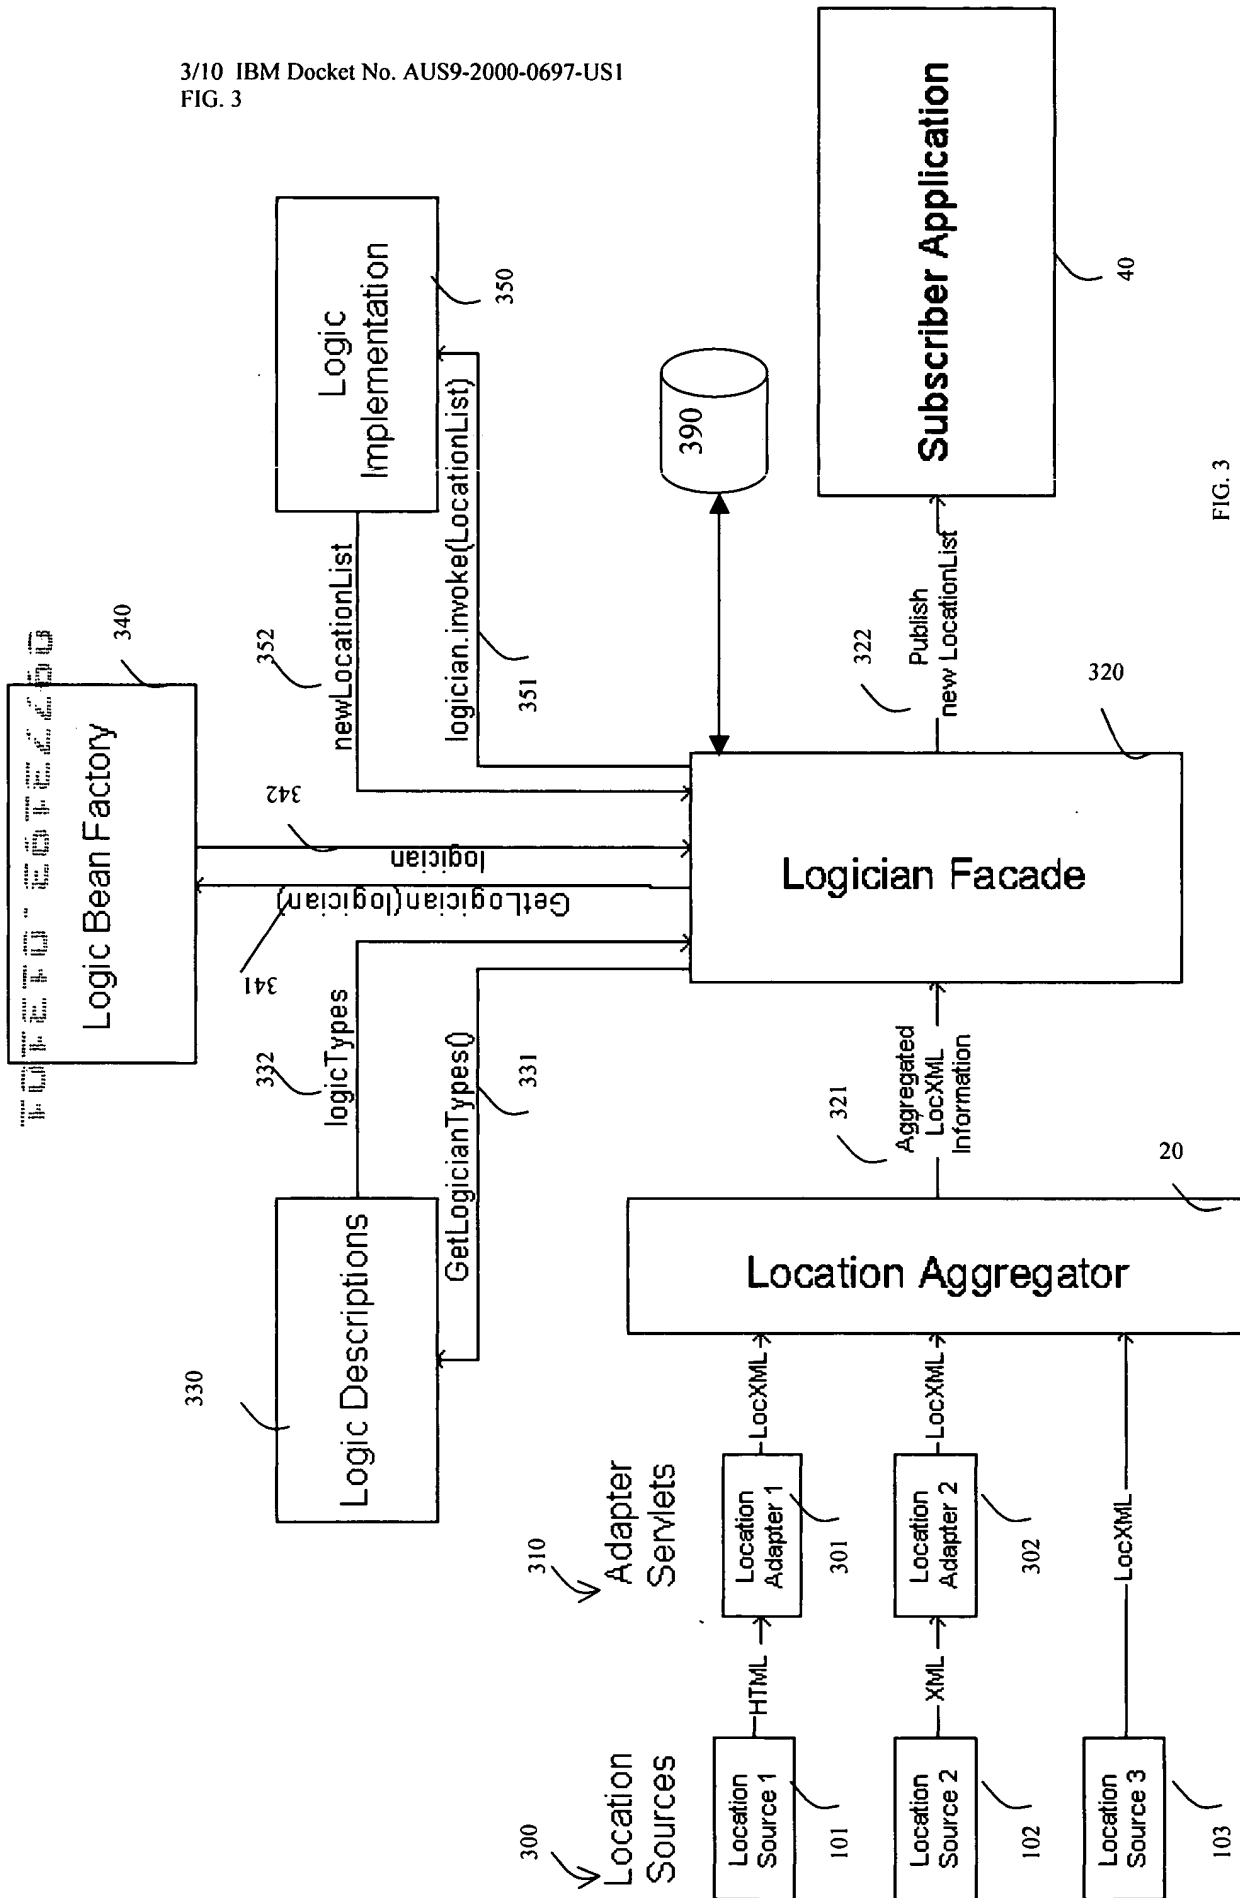


FIG. 3

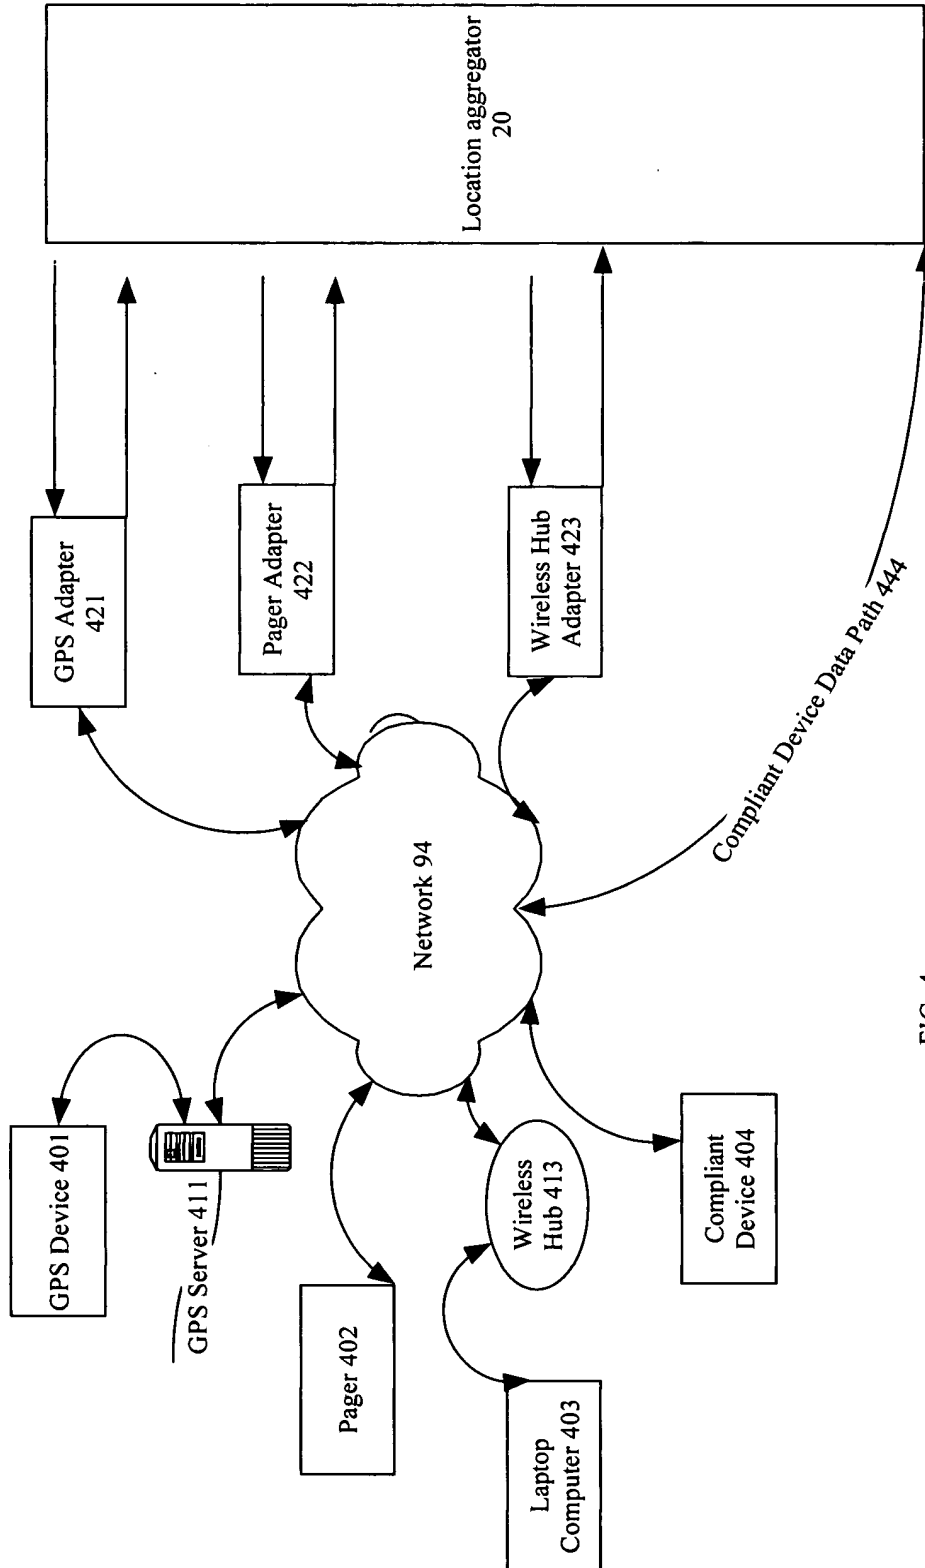


FIG. 4

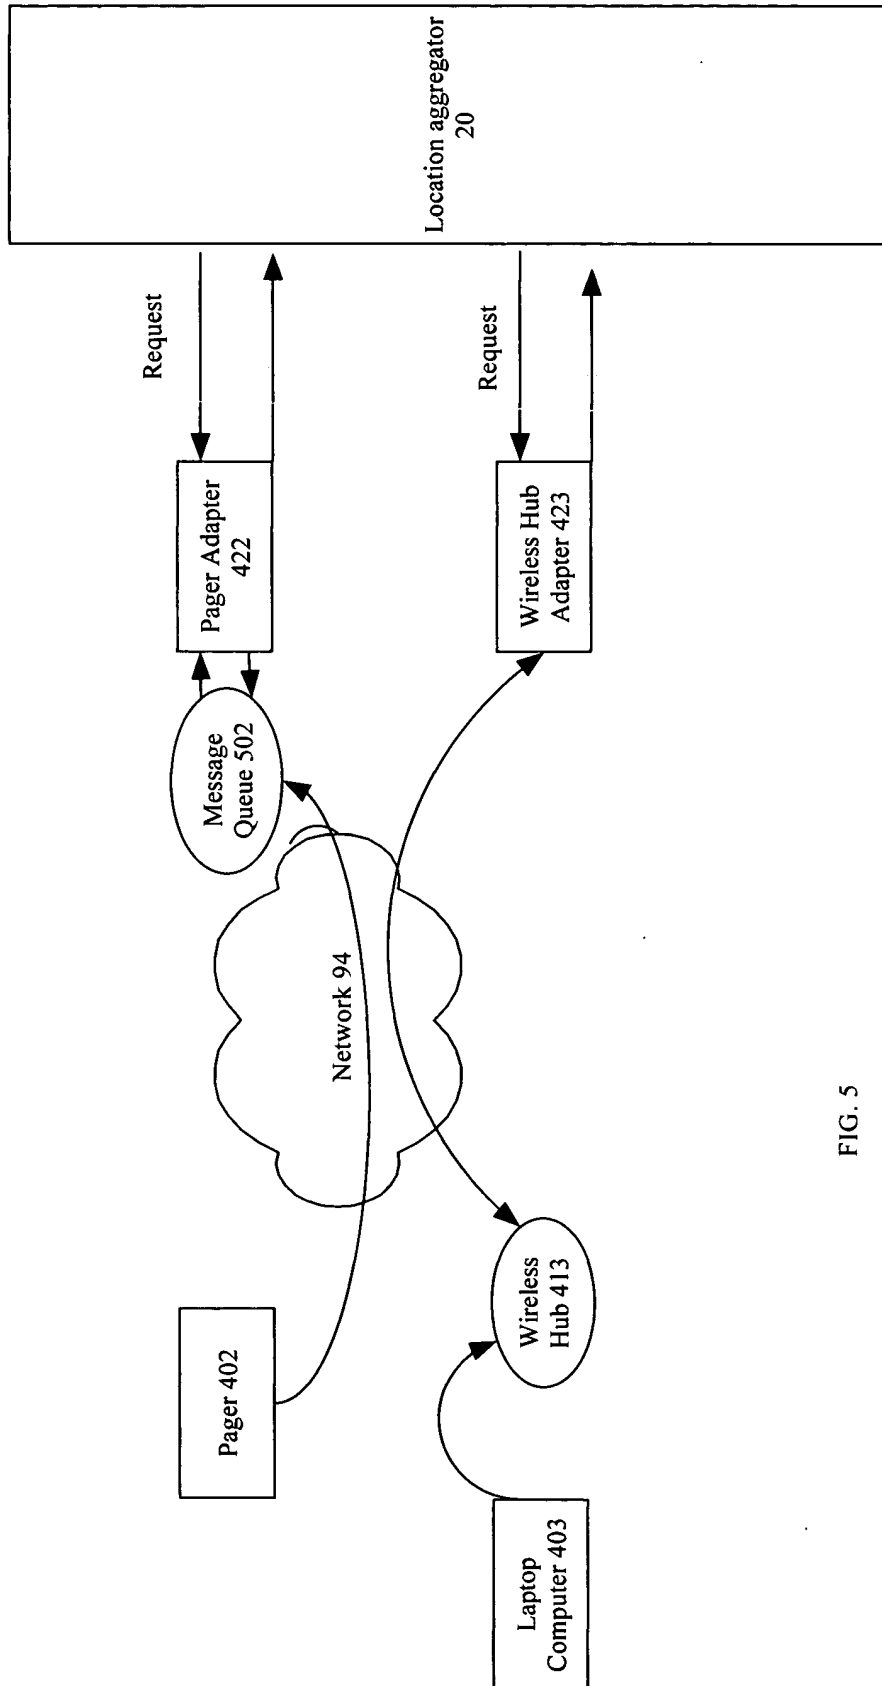


FIG. 5

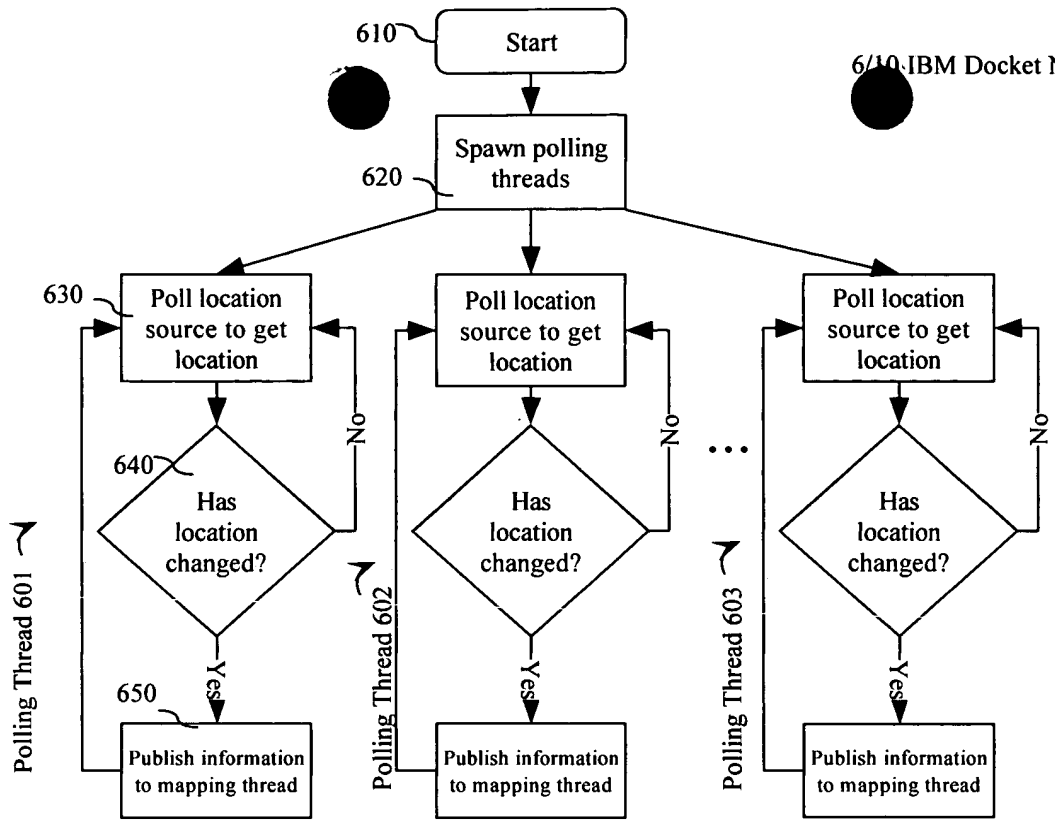


FIG. 6

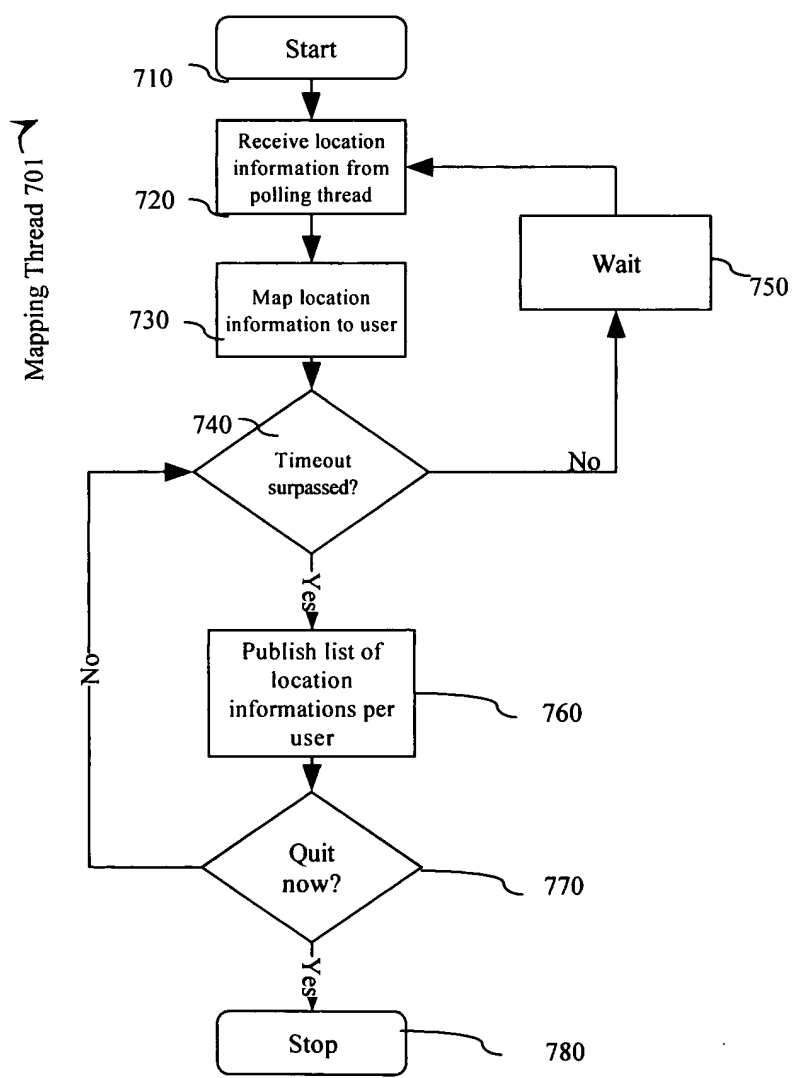


FIG. 7

811

```
-<LocationInformation>
- <MobileDevice TrackID="1234567890" RequestTime="20000626115751+-0800" ErrorCode="0">
- <Geographic Velocity="0" PositionTime="20000626115751+-0800">
- <GeodeticDatum>
- <WGS-84>
  <LatLong PositionFormat="IDMS0" Latitude="N374820" Longitude="W1222738"/>
  </WGS-84>
  </GeodeticDatum>
  <HeightDatum HeightFormat="meters" HeightValue="500"/>
  <Region RadiusFormat="meters" InnerRadius="0" OuterRadius="100" StartAngle="0" StopAngle="360"
    LevelOfConfidence="100"/>
  </Geographic>
  <TowerID PositionTime="20000626115751+-0800" Name="95110" Type="ZIP"/>
  </MobileDevice>
- </LocationInformation>
```

832

833

871

872

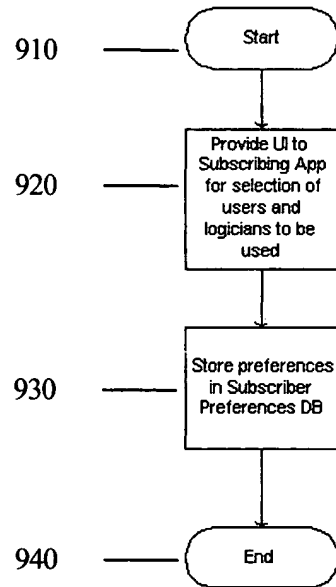


FIG. 9

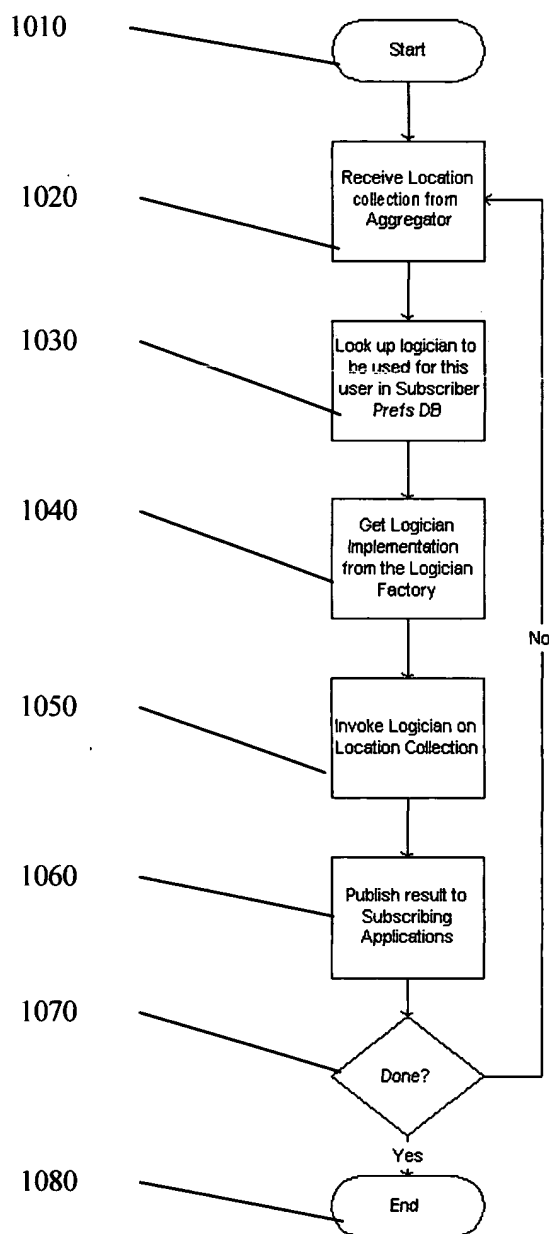


FIG. 10

10/10 IBM Docket
No. AUS9-2000-
0697-US1

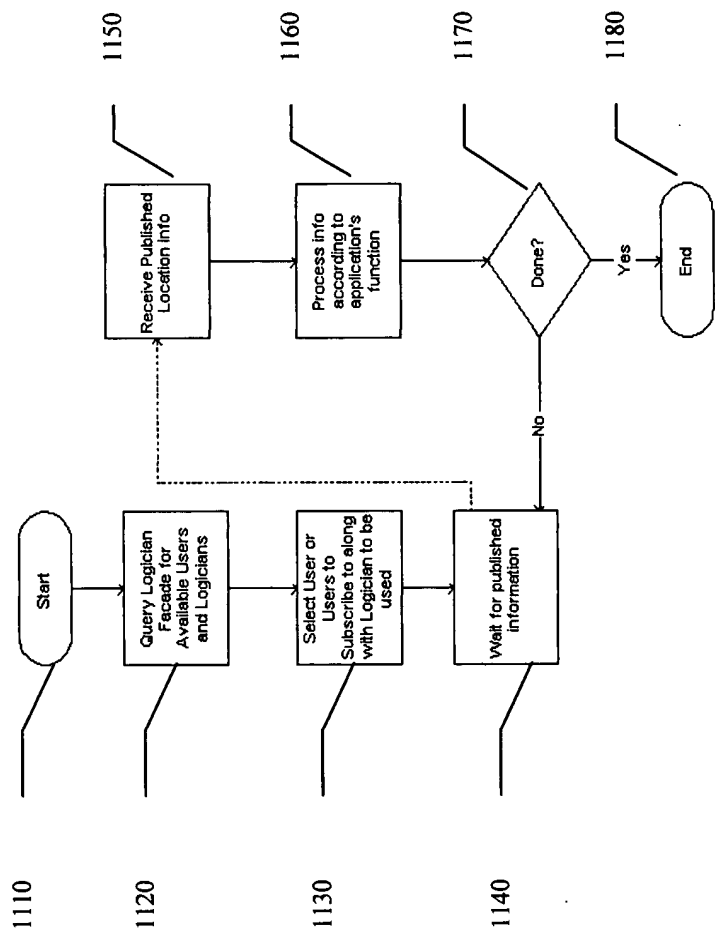


FIG. 11